

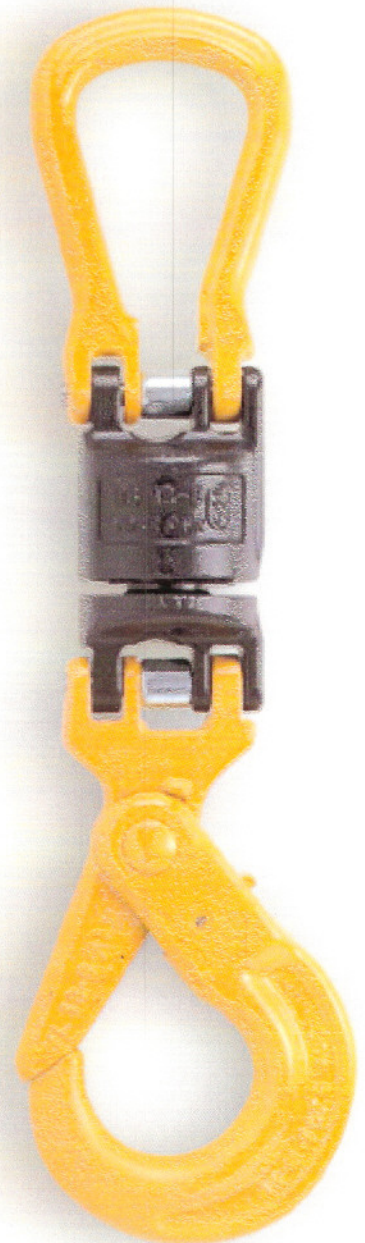


YOKE "BSI" Insulated Swivels and Fittings

- The perfect system for universal coupling of components to chain, wire rope and synthetic slings.
- Heavy hoisting with a strong but lightweight system. All components are forged high alloy steel compatible with forged chain and fittings.
- Assembly is fast and easy with only a hammer required.
- Individual swivels & components are 100% proof load tested to a minimum of 2.5 times the working load limit.
- All "BSI" Swivels are individually tested during manufacturing to assure insulating properties. A insulated test certificate is packaged with each unit shipped.
- YOKE "BSI" Insulated Swivels are designed with ball bearing which performs to fully swivel under Load.
- Acquired  certificate approved by BG  German company.

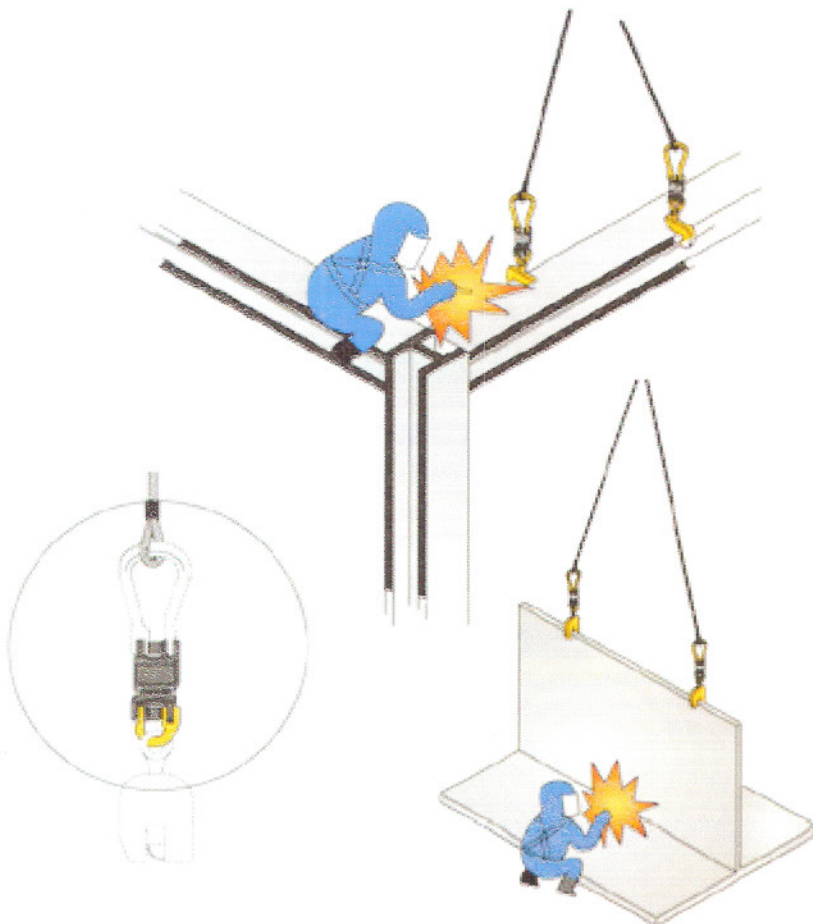

Coupling Self Locking Hook. Code " YL ".




Patent Pending

Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W.
	Lbs*	tonnes*	inch	K	P	T	H	Lbs
8-023-06	2,100	1.12	7/32	4.12	1.14	0.59	0.89	1.3
8-023-07	4,500	2.0	1/4, 5/16	4.48	1.38	0.79	1.02	1.9
8-023-10	7,100	3.15	3/8	4.84	1.77	1.02	1.34	3.9
8-023-13	12,000	5.3	1/2	7.56	2.09	1.19	1.65	6.6
8-023-16	18,100	8.0	5/8	8.15	2.44	1.73	2.17	13.2
8-023-20	28,300	12.5	3/4	13.27	2.67	1.91	2.36	19.4
8-023-22	34,200	15.0	7/8	16.61	3.15	1.93	2.80	24.9
8-023-26	47,700	21.2	1	17.20	3.90	2.20	3.11	31.3

* Design factor 4:1 proof tested and certified

YOKE's innovative, fine design with " Coupling Pin " system hook is able to solve any of your problems in Chain, Wire Rope and Synthetic Slings. The hook :


1. Create more safer lifting with the use of " Self Locking " system.
2. Assembly is fast and easy with only a hammer required.
3. Acquired (X) certificate approved by BG German company.
4. Patent : Taiwan, China, France, Germany, Italy, Japan, USA, UK, Switzerland, and Sweden.

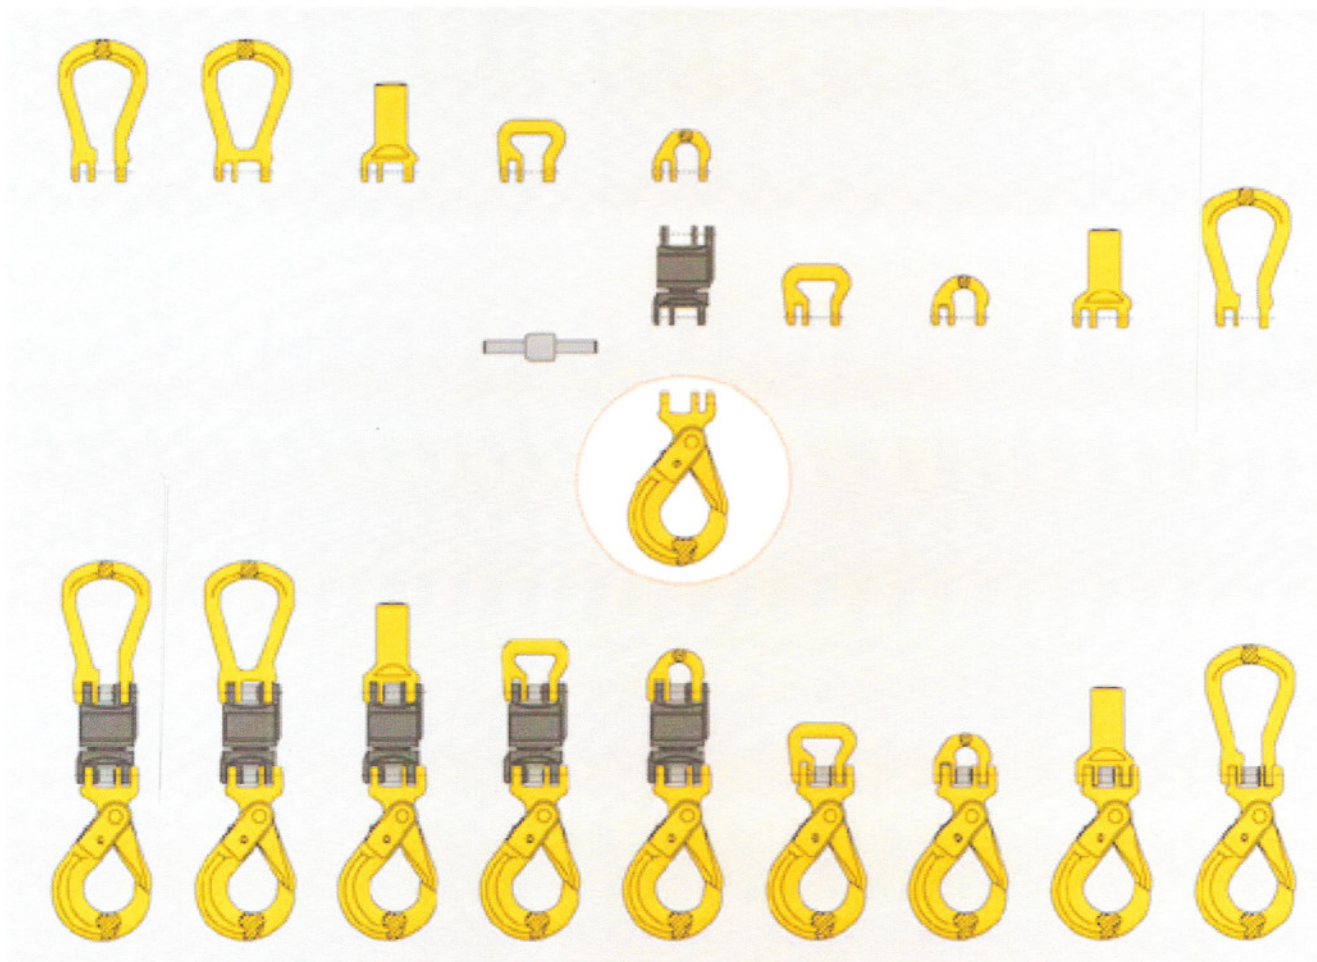

Insulated Blank Swivels, with ball bearing, Code " BSI ".

Individually tested to resist 1500 Volts insulated with Test Certificate.


Design for protection of overhead crane during welding operations on suspended loads.



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)		N.W. Lbs
	Lbs*	tonnes*	inch	D	L	
8-088-07	4,500	2.0	9/32, 5/16	1.97	2.76	1.9
8-088-10	7,100	3.15	3/8	2.44	3.39	2.6
8-088-13	12,000	5.3	1/2	3.03	4.53	5.5
8-088-16	18,100	8.0	5/8	3.70	5.28	9.7
8-088-20	28,300	12.5	3/4	4.29	6.14	15.3

* Design factor 4:1 proof tested and certified

Coupling Master Link. Code " EC ".




Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*	inch	K	W	T	H	A	
8-051-07	4,500	2.0	9/32, 5/16	3.94	1.97	0.59	0.59	0.59	0.6
8-051-10	7,100	3.15	3/8	5.00	2.56	0.75	0.75	0.79	1.3
8-051-13	12,000	5.3	1/2	5.71	2.83	0.91	0.87	0.98	2.2
8-051-16	18,100	8.0	5/8	6.85	3.15	0.98	1.02	1.18	3.5
8-051-20	28,300	12.5	3/4	8.03	4.09	1.22	1.42	1.42	5.7

* Design factor 4:1 proof tested and certified




Closed Coupling Master Link. Code " ECO ".



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*	inch	K	W	T	H	L	
8-052-07	4,500	2.0	9/32	3.94	1.97	0.59	0.59	3.07	0.6
8-052-10	7,100	3.15	3/8	5.00	2.56	0.75	0.75	3.98	1.3
8-052-13	12,000	5.3	1/2	5.71	2.83	0.91	0.87	4.45	2.4
8-052-16	18,100	8.0	5/8	6.85	3.15	0.98	1.02	5.39	3.7
8-052-20	28,300	12.5	3/4	8.03	4.09	1.22	1.42	6.50	6.1

* Design factor 4:1 proof tested and certified

Shank Coupling. Code " EA ".




Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W. Lbs
	Lbs*	tonnes*	inch	D	d min.**	L1	L2	
8-050-07	4,500	2.0	1/4-5/16	1.18	0.51	2.99	0.91	1.1
8-050-10	7,100	3.15	3/8	1.38	0.63	2.76	1.26	1.6
8-050-13	12,000	5.3	1/2	1.65	0.78	4.13	1.54	3.0
8-050-16	18,100	8.0	5/8	1.97	0.98	4.72	1.81	5.5
8-050-20	28,300	12.5	3/4	2.95	1.18	3.54	2.32	10.3

** d min.: the smallest shank dimension after machining.

Note: After machining the shank, proof loading must be carried out.

* Design factor 4:1 proof tested and certified


Coupling Sling Hook. Code " EB "



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W.
	Lbs*	tonnes*	inch	K	P	T	H	Lbs
8-055-07	4,500	2.0	1/4-5/16	3.54	1.16	0.75	0.91	0.9
8-055-10	7,100	3.15	3/8	4.53	1.42	0.91	1.22	1.9
8-055-13	12,000	5.3	1/2	5.55	1.65	1.10	1.42	3.9
8-055-16	18,100	8.0	5/8	6.61	1.85	1.26	1.77	6.9
8-055-20	28,300	12.5	3/4	7.68	2.05	1.69	1.85	10.8

* Design factor 4:1 proof tested and certified


Round Sling Coupling. Code " YW "



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W.
	Lbs*	tonnes*	inch	K	W	A	B	Lbs
8-053-06	2,100	1.12	7/32	1.18	1.50	0.59	0.87	0.4
8-053-07	4,500	2.0	1/4-5/16	1.30	1.57	0.71	0.94	0.4
8-053-10	7,100	3.15	3/8	1.73	1.85	0.98	1.14	0.8
8-053-13	12,000	5.3	1/2	2.01	2.09	1.18	1.38	1.5
8-053-16	18,100	8.0	5/8	2.48	2.64	1.42	1.69	2.6
8-053-20	28,300	12.5	3/4	2.87	3.15	1.65	2.05	4.1
8-053-22	34,250	15.0	7/8	4.37	4.92	1.97	2.76	11.6
8-053-26	47,700	21.2	1	5.08	5.91	2.28	3.39	19.8
8-053-32	72,300	31.5	1-1/4	6.34	6.30	2.72	3.58	34.1

* Design factor 4:1 proof tested and certified


Half Coupling Link, with Coupling Pin and Sleeve Locking. Code " BST "



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W.
	Lbs*	tonnes*	inch	K	A	D	L	Lbs
8-054-06	2,100	1.12	7/32	0.67	0.59	0.28	1.06	0.1
8-054-07	4,500	2.0	1/4-5/16	0.87	0.71	0.35	1.10	0.2
8-054-10	7,100	3.15	3/8	1.02	0.98	0.47	1.30	0.4
8-054-13	12,000	5.3	1/2	1.38	1.18	0.63	1.70	0.8
8-054-16	18,100	8.0	5/8	1.61	1.42	0.79	2.00	1.5
8-054-20	28,300	12.5	3/4	1.90	1.65	0.91	2.50	2.4
8-054-22	34,200	15.0	7/8	2.32	1.93	0.98	3.00	3.7
8-054-26	47,700	21.2	1	2.40	2.19	1.18	3.20	5.7
8-054-32	72,300	31.5	1-1/4	3.15	2.72	1.46	4.00	10.7

* Design factor 4:1 proof tested and certified

Coupling Pin and Sleeve Set.



Item No.	Working Load Limit		For Grade 80 Chain	Dimensions (inch)				N.W.
	Lbs*	tonnes*	inch	W	D	L	d	Lbs
8-P015-06	2,100	1.12	7/32	0.35	0.43	1.73	0.20	0.02
8-P015-07	4,500	2.0	1/4-5/16	0.47	0.51	1.97	0.24	0.04
8-P015-10	7,100	3.15	3/8	0.71	0.83	2.64	0.31	0.08
8-P015-13	12,000	5.3	1/2	0.83	0.71	3.23	0.39	0.15
8-P015-16	18,100	8.0	5/8	0.88	0.94	4.13	0.47	0.33
8-P015-20	28,300	12.5	3/4	1.14	1.18	4.57	0.59	0.57
8-P015-22	34,200	15.0	7/8	1.34	1.30	5.39	0.67	0.88
8-P015-26	47,700	21.2	1	1.46	1.50	6.54	0.79	1.37
8-P015-32	72,300	31.5	1-1/4	1.77	1.77	8.03	0.94	2.29

* Design factor 4:1 proof tested and certified

Insulated Swivels, with Shank & Coupling Sling Hook.



Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	T	H	D	L1	
8-132-07	4,500	2.0	1/4-5/16	10.20	0.75	0.91	1.18	2.95	4.0
8-132-10	7,100	3.15	3/8	11.93	0.91	1.22	1.38	2.78	6.0
8-132-13	12,000	5.3	1/2	15.75	1.10	1.42	1.65	4.13	12.8
8-132-16	18,100	8.0	5/8	18.43	1.26	1.77	1.97	4.72	22.7
8-132-20	28,300	12.5	3/4	19.69	1.69	1.89	2.95	3.54	37.7

* Design factor 4:1 proof tested and certified

Insulated Swivels, with Shank & Coupling Self Locking Hook.



Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	T	H	D	L1	
8-121-07	4,500	2.0	1/4-5/16	11.61	0.75	0.94	1.16	2.90	4.4
8-121-10	7,100	3.15	3/8	13.35	0.94	1.22	1.38	2.78	8.5
8-121-13	12,000	5.3	1/2	17.76	1.06	1.57	1.65	4.13	16.0
8-121-16	18,100	8.0	5/8	20.79	1.42	2.09	1.97	4.72	29.5
8-121-20	28,300	12.5	3/4	25.28	1.89	2.36	2.95	3.54	44.9

* Design factor 4:1 proof tested and certified


Insulated Swivels, with Half Link & Coupling Self Locking Hook.



Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	T	H	A	D	
8-122-07	4,500	2.0	1/4-5/16	8.90	0.75	0.94	0.71	0.35	3.5
8-122-10	7,100	3.15	3/8	10.75	0.94	1.22	0.98	0.47	7.0
8-122-13	12,000	5.3	1/2	13.90	1.06	1.57	1.18	0.63	13.6
8-122-16	18,100	8.0	5/8	16.34	1.42	2.09	1.42	0.79	25.1
8-122-20	28,300	12.5	3/4	21.77	1.89	2.36	1.65	0.91	36.3

* Design factor 4:1 proof tested and certified

Insulated Swivels, with 2 Half Links.



Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)			N.W. Lbs
	Lbs*	tonnes*		L	A	D	
8-123-07	4,500	2.0	1/4-5/16	4.96	0.71	0.35	2.2
8-123-10	7,100	3.15	3/8	6.00	0.98	0.47	3.4
8-123-13	12,000	5.3	1/2	7.93	1.18	0.63	7.3
8-123-16	18,100	8.0	5/8	9.28	1.42	0.79	12.5
8-123-20	28,300	12.5	3/4	11.14	1.65	0.91	20.0

* Design factor 4:1 proof tested and certified


Insulated Swivels, with Open Master Link & Coupling Self Locking Hook.

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	T	H	W	t	
8-124-07	4,500	2.0	1/4-5/16	11.65	0.75	0.94	1.97	0.59	3.9
8-124-10	7,100	3.15	3/8	14.41	0.94	1.22	2.56	0.75	7.9
8-124-13	12,000	5.3	1/2	17.78	1.06	1.57	2.83	0.91	14.9
8-124-16	18,100	8.0	5/8	21.10	1.42	2.09	3.15	0.98	27.0
8-124-20	28,300	12.5	3/4	27.44	1.89	2.36	4.09	1.22	39.6

★ Design factor 4:1 proof tested and certified


Insulated Swivels, with Open Master Link & Sling Hook.


Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	T	H	W	t	
8-125-07	4,500	2.0	1/4-5/16	10.24	0.75	0.91	1.97	0.59	3.0
8-125-10	7,100	3.15	3/8	12.91	0.91	1.22	2.56	0.75	6.6
8-125-13	12,000	5.3	1/2	15.79	1.10	1.42	2.83	0.91	12.9
8-125-16	18,100	8.0	5/8	18.74	1.26	1.77	3.15	1.08	22.2
8-125-20	28,300	12.5	3/4	21.85	1.69	1.89	4.09	1.22	34.3

★ Design factor 4:1 proof tested and certified


Insulated Swivels, with Open Master Link & Half Link.

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)					N.W. Lbs
	Lbs*	tonnes*		L	A	D	W	t	
8-126-07	4,500	2.0	1/4-5/16	8.24	0.71	0.35	1.97	0.59	2.7
8-126-10	7,100	3.15	3/8	9.35	0.98	0.47	2.56	0.75	4.4
8-126-13	12,000	5.3	1/2	11.18	1.18	0.63	2.83	0.91	9.0
8-126-16	18,100	8.0	5/8	13.62	1.42	0.79	3.15	0.98	15.2
8-126-20	28,300	12.5	3/4	15.60	1.65	0.91	4.09	1.22	24.4

★ Design factor 4:1 proof tested and certified


Insulated Swivels, with Half Link & Web Sling Connector.

Item No.	Working Load Limit		For Grade 80 Chain inch	Dimensions (inch)			N.W. Lbs
	Lbs*	tonnes*		K	P	w	
8-130-07	4,500	2.0	1/4-5/16	5.20	2.75	0.91	2.6
8-130-10	7,100	3.15	3/8	6.45	3.39	1.22	4.0
8-130-13	12,000	5.3	1/2	8.27	4.53	1.42	7.8
8-130-16	18,100	8.0	5/8	9.80	5.23	1.77	14.3
8-130-20	28,300	12.5	3/4	11.34	6.14	1.89	22.3

★ Design factor 4:1 proof tested and certified